

PRODUCTION +

* Main(1280x720)

Preview Program

Layout

20

18px

Live

Screen

Source

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

E1-200130064 (lua)

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

AAAA (vMix - Output 1)

AAAA (vMix - Output 1)

AAAA (vMix - Output 1)

AAAA (vMix - Output 1)

AAAA (vMix - Output 1)

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

AAAA (vMix - Output 1)

AAAA (vMix - Output 2)

AAAA (vMix - Output 2)

AAAA (vMix - Output 2)

AAAA (vMix - Output 2)

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

640x368@25Hz

Multiview Pro 快速入门 v2.2

自动发现

NDI DESKTOP-279JQHI (Remote ...)

ndi-app:DESKTOP-279JQHI%20(Remote...)

NDI E1-200130064 (lua)

192.168.28.120:5961

NDI E2_NDI-%N (1234567809)

192.168.28.27:5961

NDI N30-21162510258 (channel-1)

192.168.28.22:5962

NDI AAAA (vMix - Output 1)

192.168.22.1:5961

NDI AAAA (vMix - Output 2)

192.168.22.1:5962

NDI N3-20072110107 (Channel-1)

192.168.28.21:5961

NDI U40-21164010128 (Channel-...)

192.168.28.154:5961

NDI N3-21072610102 (Channel-1)

192.168.28.23:5961

手动添加

打开Multiview Pro, 将链接复制或输入到Web浏览器, 或者使用移动设备(平板、iPad)扫描二维码, 访问Multiview Pro的客户端。(默认登录用户和密码为: admin/admin)

设置中可修改NDI的主机名和登录端口

设置

NDI主机名: AAAA

Web端口: 81

注意: 您需要重新启动应用后才能更改生效。

保存 立刻重新启动



设置

端口: 81

版本信息: V_1.10.0028



试用期限50天

Multiview Pro

扫描二维码或复制链接分享




<https://192.168.22.1:81/>

复制链接

开机自启动

在web上登录后，首次需要先建立制作，制作最高支持3840x2160的分辨率同时支持自定义分辨率；

制作建立完成后，先添加布局，界面默认显示常见几种分屏模式，可自行选择切换，最多支持20分屏

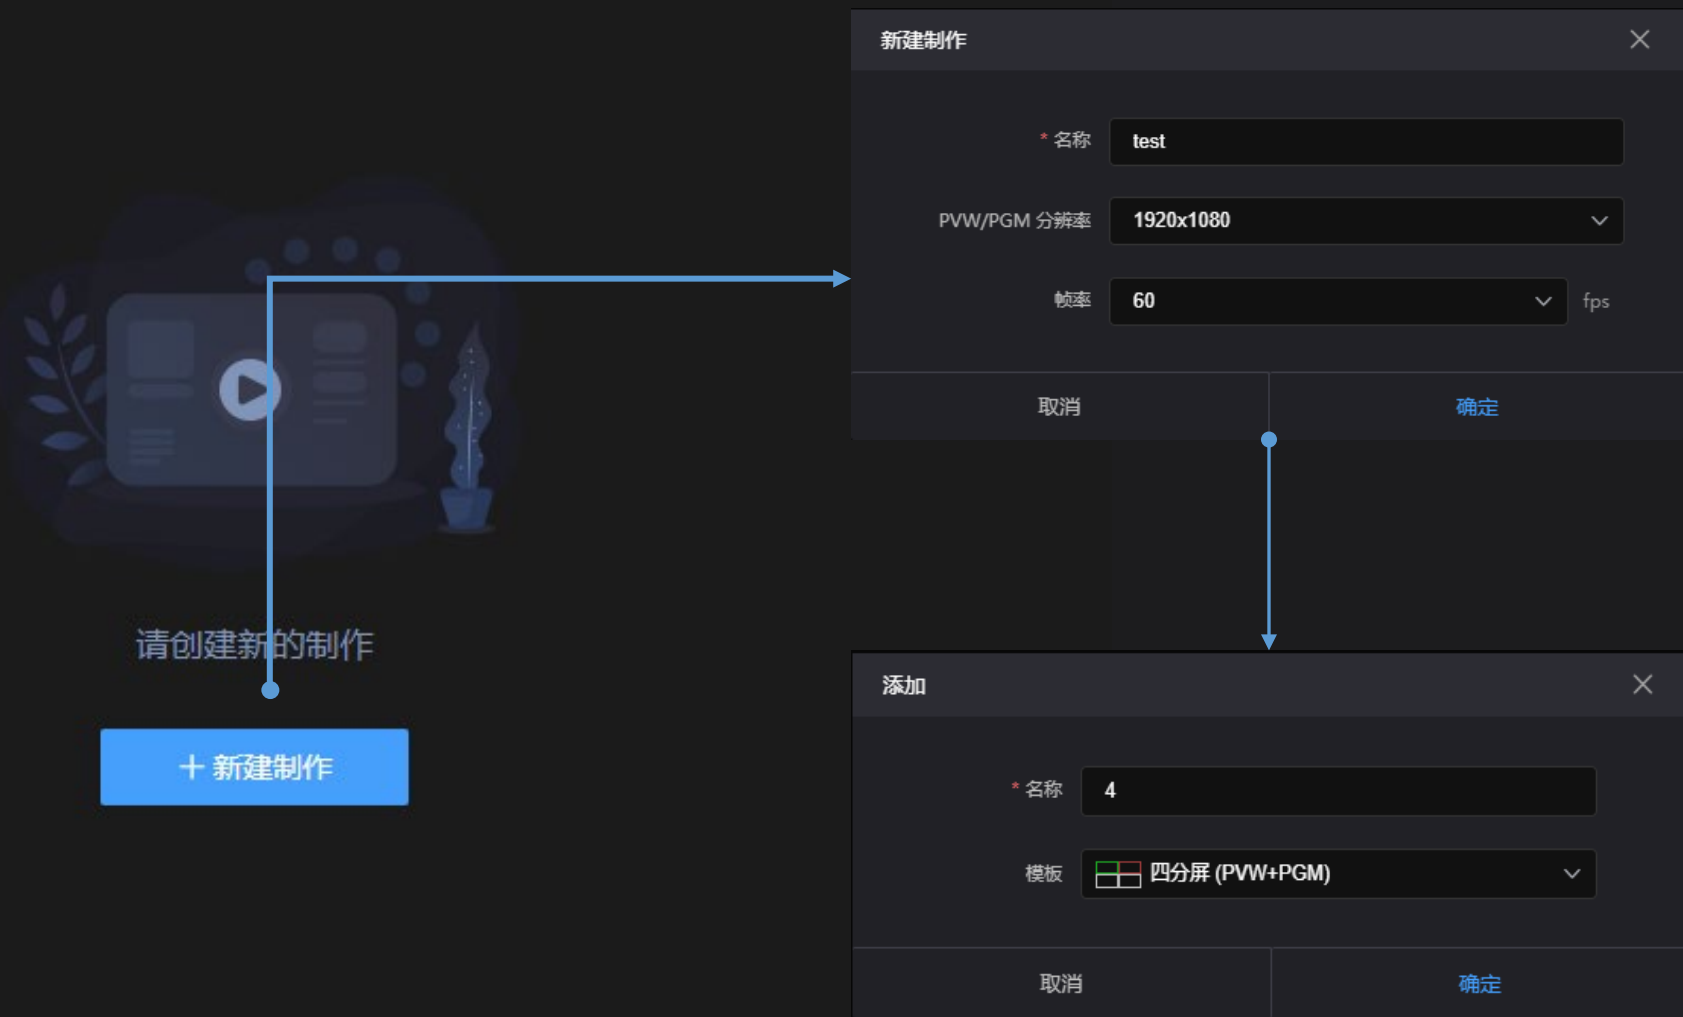

显示视频源名称、分辨率等信息

发现视频源后，把视频源拖入布局窗口中进行播放观看

视频源列表-自动发现同一局域网内的NDI源

The screenshot displays the Kiloview Multiview Pro interface. On the left, a sidebar shows a 'test' production with a source list including 'Main (1920x1080)', 'PVW', and 'PGM'. The main window shows a video feed of a restaurant interior, labeled 'N60 (FULL) 1920x1080@60Hz'. On the right, a '来源' (Sources) panel lists discovered NDI sources, including 'auto-discovery', 'NDI AAAA (My Connection)', 'NDI ADMIN (VLC)', and others. A blue arrow points from the text '显示视频源名称、分辨率等信息' to the source list. Another blue arrow points from the text '发现视频源后，把视频源拖入布局窗口中进行播放观看' to the video feed. A third blue arrow points from the text '视频源列表-自动发现同一局域网内的NDI源' to the source list.

新添加一个制作，名称可支持自定义同时支持设定PVW和PGM的分辨率和帧率

添加一个窗口，名称可支持自定义同时支持设定编号范围和帧率

对当前制作进行属性修改，重命名等操作

KILOVIEW® Multiview Pro

PRODUCTION

- test

- Main (1920x1080)
- PVW 停止制作
- PGM 修改制作属性
- 重命名
- 二维码
- 删除

系统信息

名称: test

分辨率: 1920x1080

帧率: 60 fps

Main + PVW PGM

布局 1 #0~0

N60 (FULL)
1920x1080@60Hz

新建窗口

* 名称

分辨率 1280x720

帧率 60 fps

编号范围

编号范围 1 ~ 1

取消 确定


CHIMEI INNOLUX

来源

- auto-discovery
 - NDI AAAA (My Connection)
ndi-app:AAAA%20(My%20Connection)
 - NDI AAAA (Remote Connection 1)
ndi-app:AAAA%20(Remote%20Connectic
 - NDI ADMIN (VLC)
192.168.28.167:5961
 - NDI N3-20072110107 (Channel-1)
192.168.28.21:5962
 - NDI N30-21162510258 (channel-1)
192.168.28.22:5962
 - NDI N60 (FULL)
192.168.28.172:5962
 - NDI N60 (NDIHX)
192.168.28.172:5981
 - NDI U40-21164010128 (Channel-1)
192.168.28.154:5961
- test 1

在软件中添加的新的布局后，可以在列表中使用所需要的布局

显示当前已添加的NDI源组，默认存在源列表-自动发现，用户可根据工作要求自行添加新的NDI源组-手动添加

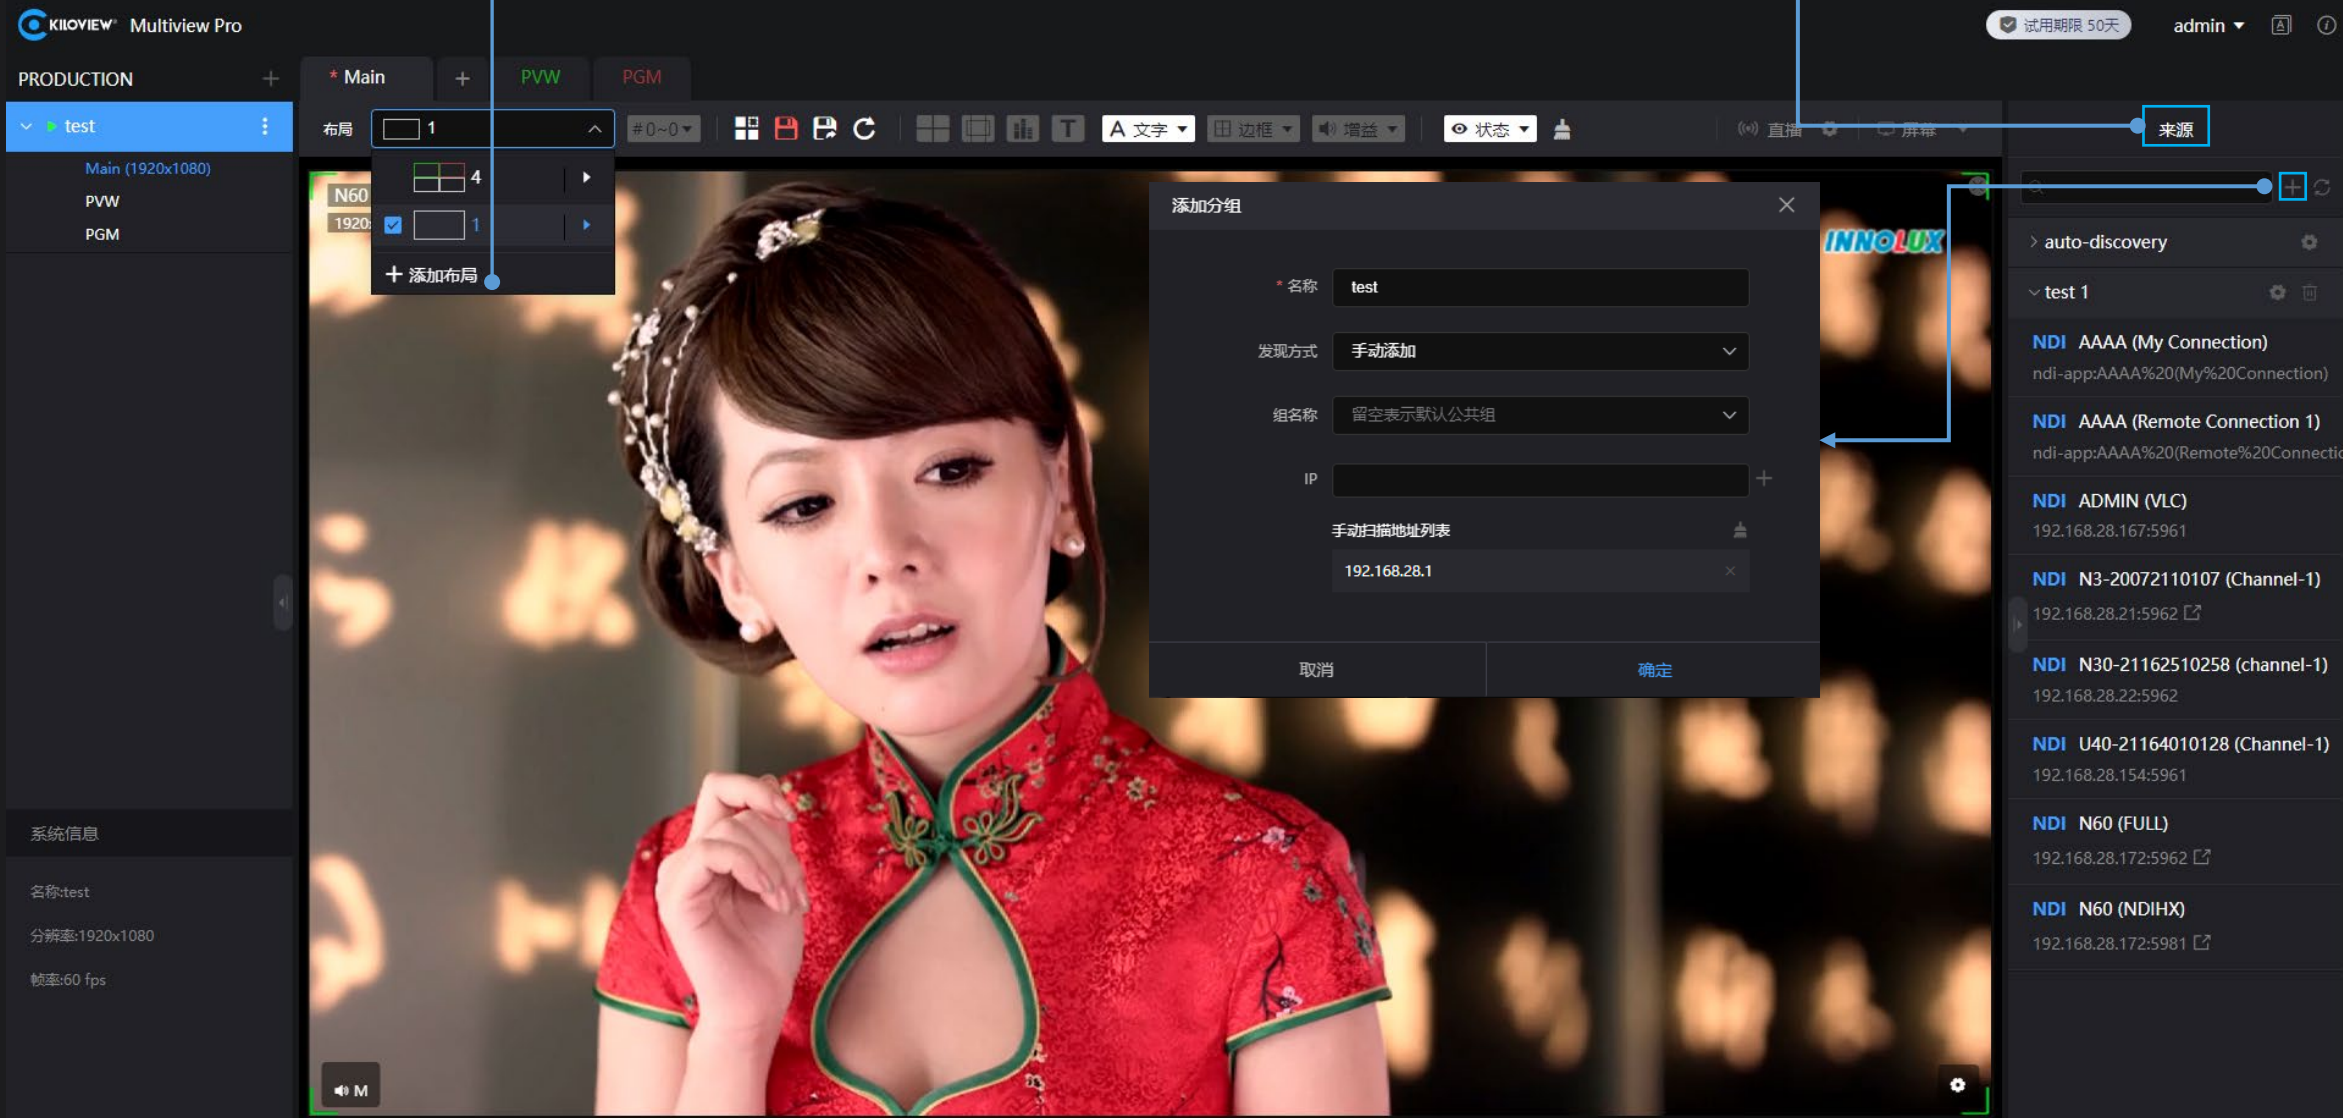

The screenshot displays the Kiloview Multiview Pro interface. On the left, a sidebar shows a layout list with 'test' selected. A layout selection menu is open, showing options for 1, 4, and 1920x1080 layouts. The main window shows a video feed of a woman in a red qipao. A '添加分组' (Add Group) dialog box is open, allowing manual addition of NDI sources. The dialog includes fields for name, discovery method (set to '手动添加'), group name, IP, and a list of manual scan addresses (192.168.28.1). On the right, a source list shows various NDI connections, including 'auto-discovery' and several manually added sources like 'NDI AAAA (My Connection)' and 'NDI ADMIN (VLC)'. A '来源' (Source) button is highlighted in the top right corner of the source list.

- Main (1920x1080)
- PVW
- PGM



图标	说明
	切换系统语言
	编辑布局, 保存当前布局内容, 以及将当前布局进行另存
	开启和关闭所有播放视频源中心线的显示
	开启和关闭所有播放视频源安全框
	开启和关闭所有播放视频源音柱显示
	开启和关闭所有播放视频源显示名称
	开启设置名称字体的大小和颜色
	开启和关闭所有播放视频源边框叠加和设置边框颜色
	开启和关闭所有播放视频源的音频增益和设置音频增益参数
	开启和关闭显示NDI源的通道信息和分辨率信息
	清理当前布局的所有内容
	开启和关闭当前布局的NDI输出
	开启电脑多屏幕切换, 可以把主屏幕的内容切换到任意的分屏

系统信息


名称: test

分辨率: 1920x1080

帧率: 60 fps

点击编辑布局后，可进入布局根据自身需求自定义增加，删除和调整布局大小。支持多个窗格的图层处理如进行图层置顶，图层上移等操作

布局中的模块的大小和位置可通过鼠标点击拉伸或右边的“宽”、“高”、“水平”和“垂直”来设置

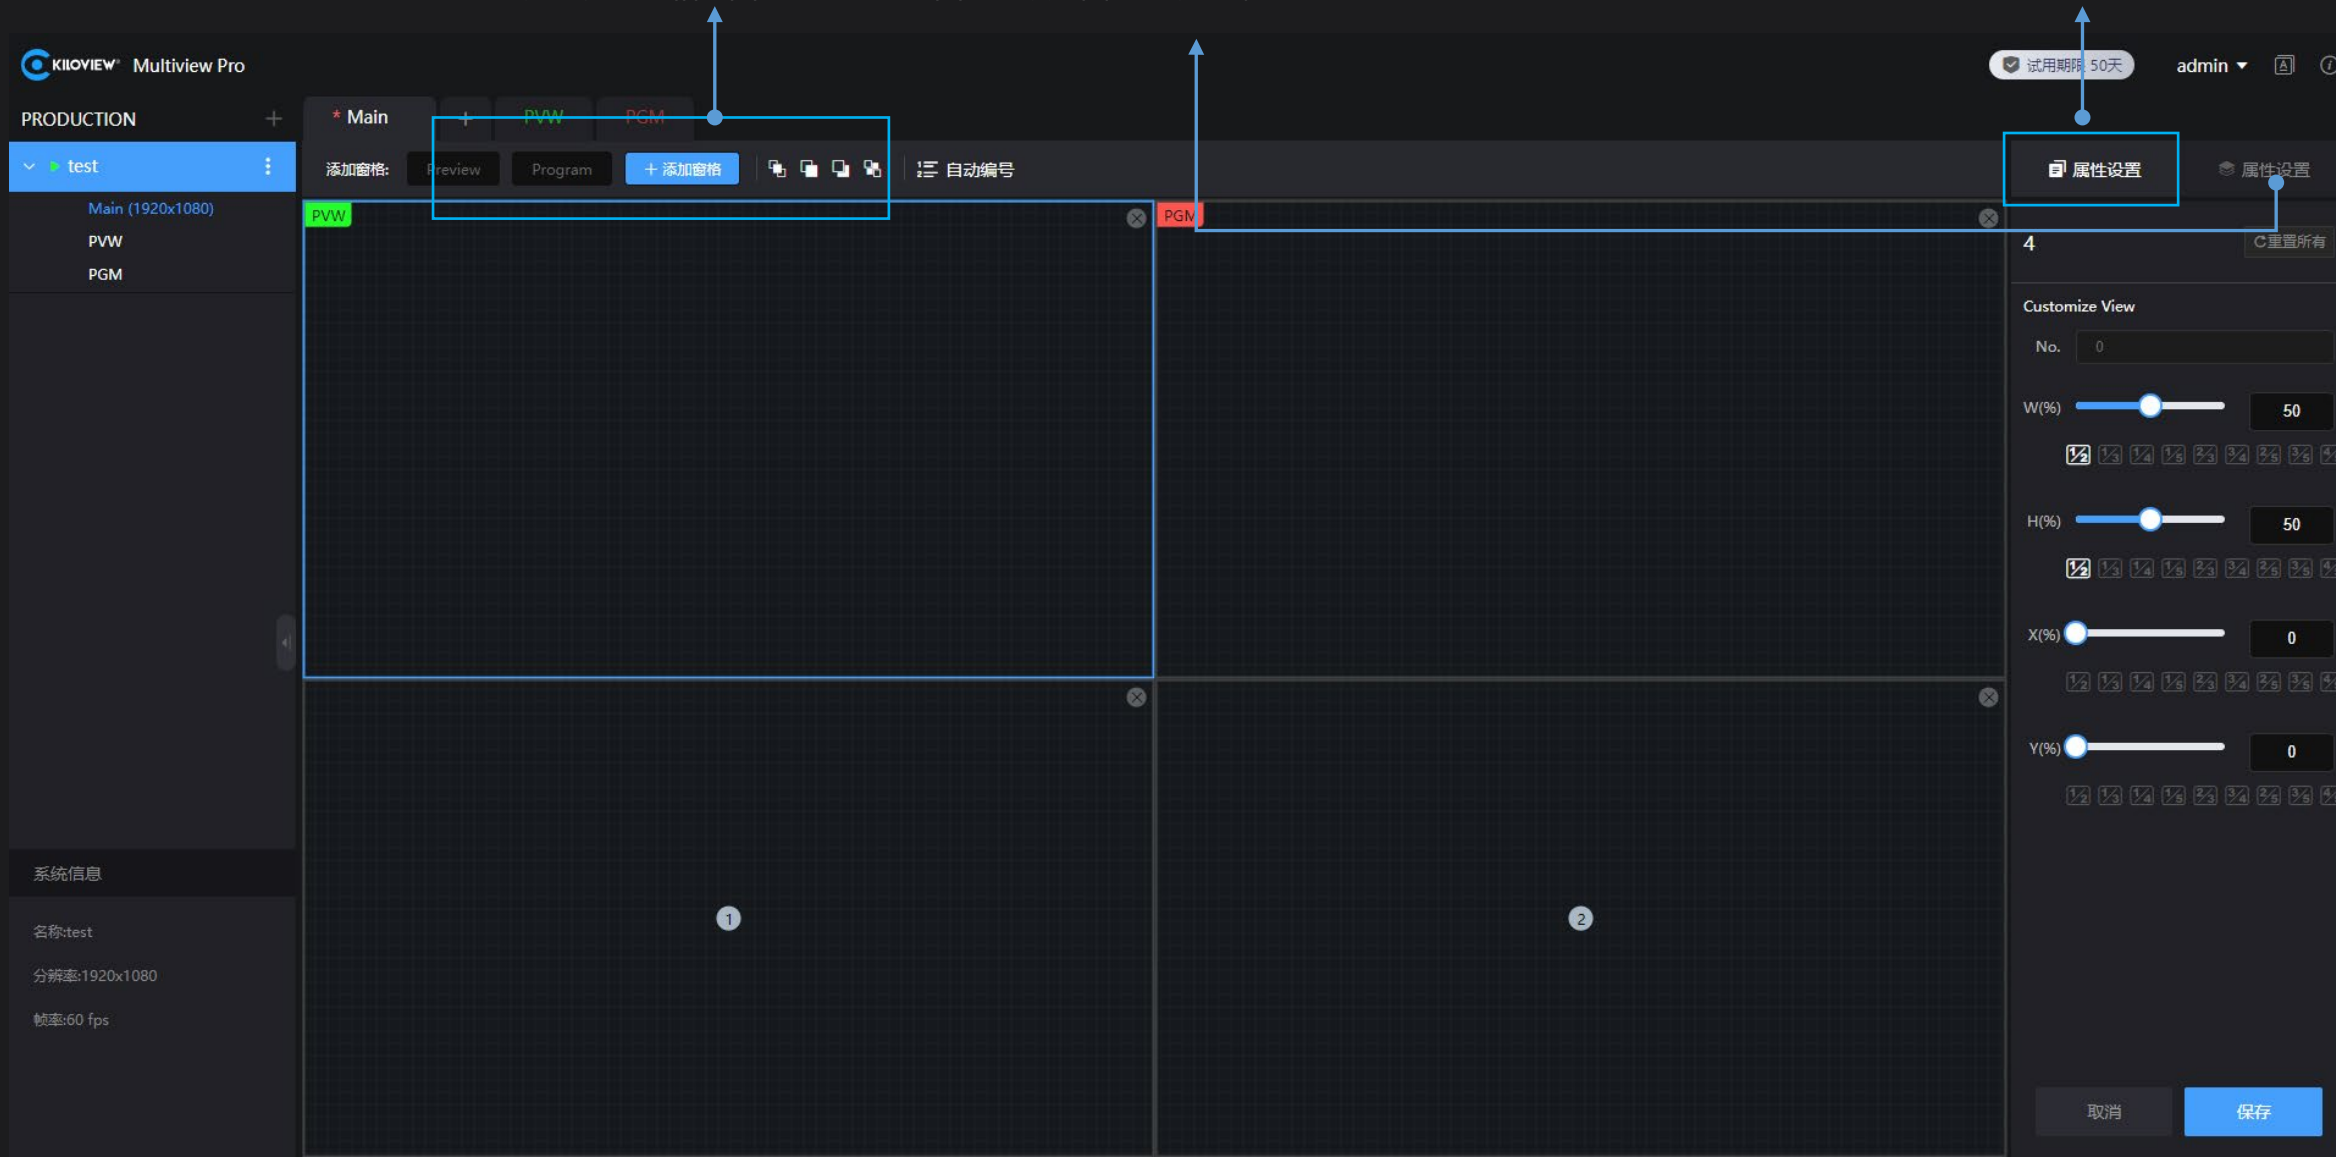

The screenshot displays the Kiloview Multiview Pro interface. At the top left, the logo and 'Multiview Pro' are visible. Below it, a sidebar shows a project tree with 'test' selected. The main workspace is a grid with three view windows: 'Main', 'PVW', and 'PGM'. A toolbar above the grid contains buttons for '添加窗格' (Add Window), 'Preview', 'Program', and '自动编号' (Auto Numbering). On the right, the '属性设置' (Property Settings) panel is open, showing sliders for 'W(%)', 'H(%)', 'X(%)', and 'Y(%)'. The 'W(%)' and 'H(%)' sliders are set to 50, while 'X(%)' and 'Y(%)' are set to 0. A '保存' (Save) button is at the bottom right of the settings panel. Annotations include a blue box around the '+ 添加窗格' button and arrows pointing to the view windows and the settings panel.

绿色框内的图像为PVW信号

红色框框内的图像为PGM信号



单击PVW/PGM, 可进入全屏监看当前的PVW/PGM信号视频

PVW设置选项支持Take切换，点击Take切换，可实现PVW和PGM信号中的视频切换。同时支持设置切换效果。另外还支持编辑视频源的标题名称，开启名称；音柱；安全框；中心线以及PTZ控制

音频设置选项默认状态是静音 (M)。
 Audio Assigned (音频锁定) 表示音频锁定从PGM中输出
 Audio Follow Video(AFV) 表示音频跟随视频

在Main页面开启直播，表示将当前页面图像内容进行NDI直播输出。如果需要修改NDI输出的分辨率和帧率，需要修改Main的窗口属性；
 点击直播的设置按钮可对支持对NDI连接进行设置，支持设置组播模式进行连接，设置NDI组，以及NDI发现服务器

修改Main的窗口属性

The screenshot displays the Kiloview Multiview Pro interface. At the top, the '直播' (Live) button is highlighted with a red box and a blue arrow pointing to the text above. A 'NDI输出设置' (NDI Output Settings) dialog box is open in the center, showing fields for connection type (默认), group address (239.255.0.0), subnet mask (255.255.0.0), TTL (1), and group name (留空表示默认公共组). A '发现服务' (Discover Services) toggle is also visible. On the right side, a '来源' (Sources) panel lists several NDI sources, including 'NDI DESKTOP-279JQHI (Remote ...)', 'NDI ADMIN (VLC)', 'NDI DESKTOP-LB2ROI1 (vMix - ...)', 'NDI N3-20072110107 (Decoding...)', 'NDI AAAA (test_Main)', 'NDI DESKTOP-279JQHI (1_Main)', 'NDI N60 (FULL)', 'NDI N60 (NDIHX)', 'NDI NDICORE-SRC (a)', 'NDI NDICORE-SRC (b)', and 'NDI NDICORE-SRC (dst-yuan1)'. The main preview area shows a multi-view layout with a large 'Main' window displaying a boat on the water and a smaller window showing a woman in a red qipao.

在PVW/PGM页面开启直播即表示将当前页面图像内容进行NDI直播输出。支持通过Take功能实现PVW和PGM的视频切换；
 如果需要修改NDI输出的分辨率和帧率，需要修改当前的制作属性。修改制作属性前需要先停止制作，然后再修改

修改制作的窗口属性



- auto-discovery
- NDI DESKTOP-279JQHI (Remote ...
ndi-app:DESKTOP-279JQHI%20(Remote
- NDI ADMIN (VLC)
192.168.28.167:5961
- NDI DESKTOP-LB2ROI1 (vMix - ...
192.168.22.3:5961
- NDI N3-20072110107 (Decoding...
192.168.22.21:5961
- NDI AAAA (test_Main)
192.168.22.1:5961
- NDI DESKTOP-279JQHI (1_Main)
192.168.176.1:5961
- NDI N60 (FULL)
192.168.28.172:5962
- NDI N60 (NDIHx)
192.168.28.172:5981
- NDI NDICORE-SRC (a)
192.168.39.93:6093
- NDI NDICORE-SRC (b)
192.168.39.93:6092
- NDI NDICORE-SRC (dst-yuan1)
192.168.20.83:6076

通过“窗口”进行配置，把当前的视频预览画面送到对应其他屏幕上显示，可一键全屏到对应的显示器窗口

The screenshot displays the KiloView Multiview Pro software interface. The main window shows a video preview of a dish, with the text "CHIMEI INNO UX" overlaid. The interface includes a top navigation bar with "Main", "PVW", and "PGM" buttons. On the left, there is a "PRODUCTION" sidebar with a tree view showing "1" and "3". On the right, there is a "来源" (Sources) panel listing various NDI sources, including "NDI DESKTOP-279JQHI (Remote ...)", "NDI N3-20072110107 (Decoding...)", "NDI AAAA (test_Main)", "NDI DESKTOP-279JQHI (1_PGM)", "NDI DESKTOP-LB2ROI1 (vMix - ...)", "NDI ADMIN (VLC)", "NDI N60 (FULL)", "NDI N60 (NDIHX)", "NDI NDICORE-SRC (a)", "NDI NDICORE-SRC (b)", and "NDI NDICORE-SRC (dst-yuan1)". A blue arrow points from the text above to the "屏幕" (Screen) button in the top right corner of the interface.



让“视界”畅通无阻!



长沙千视电子科技有限公司

电话: 18573195256 邮箱: sales@kiloview.com 技术支持: support@kiloview.com

地址:长沙市雨花区汇金路877号嘉华智谷产业园长沙屿B4栋106、109号