


User manual


Kiloview C1 Mini can convert single channel original image of SDI signal to HDMI signal without damage, and SDI-owned audio embedded into HDMI signal, to realize audio and image output simultaneously.

1 Applications

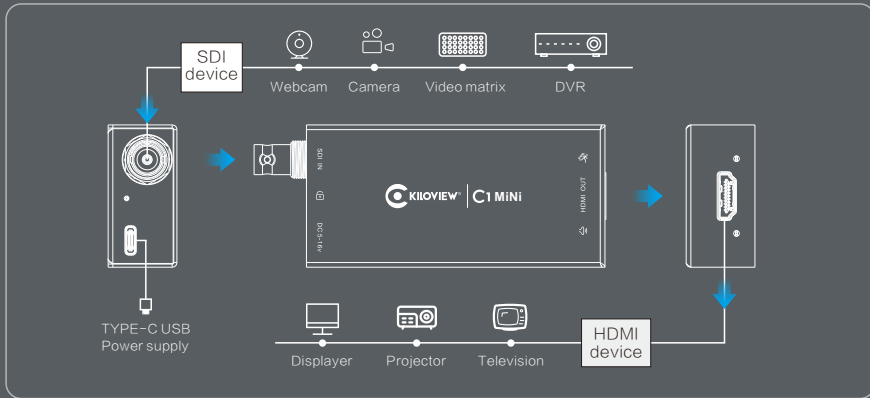

2 Dial switch descriptions

Kiloview C1 Mini supports professional production auxiliary functions including image safe area, volume meter, center cross and so on (You can enable or disable freely).

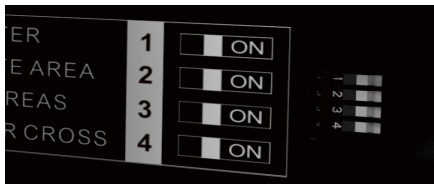

-  1.VU METER
-  2.4:3 SAFE AREA
-  3.SAFE AREAS
-  4.CENTER CROSS

3 Parameters

Model No.	C1 Mini
Resolution	Support up to 1080P/60Hz
Transmission rate	2.97Gbps
Size	46*96*23MM
Weight	120g
Power consumption	1w
Power	5~18V
Working temperature	-20℃~60℃



KILOVIEW ELECTRONICS CO.,LTD.

Phone: +86 731 88315979/+86 155 7666 2088

Sales: info@kiloview.com

Support: support@kiloview.com

Website: <https://www.kiloview.com/en/>

Address: 188#, Middle Huanbao Rd, Yuhua District, Changsha, Hunan, China.